


STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
6000

APP 119.400
TWR 118.300

PONTA DELGADA
João Paulo II (LPPD)
RNAV RWY 30
MIPRU 2X

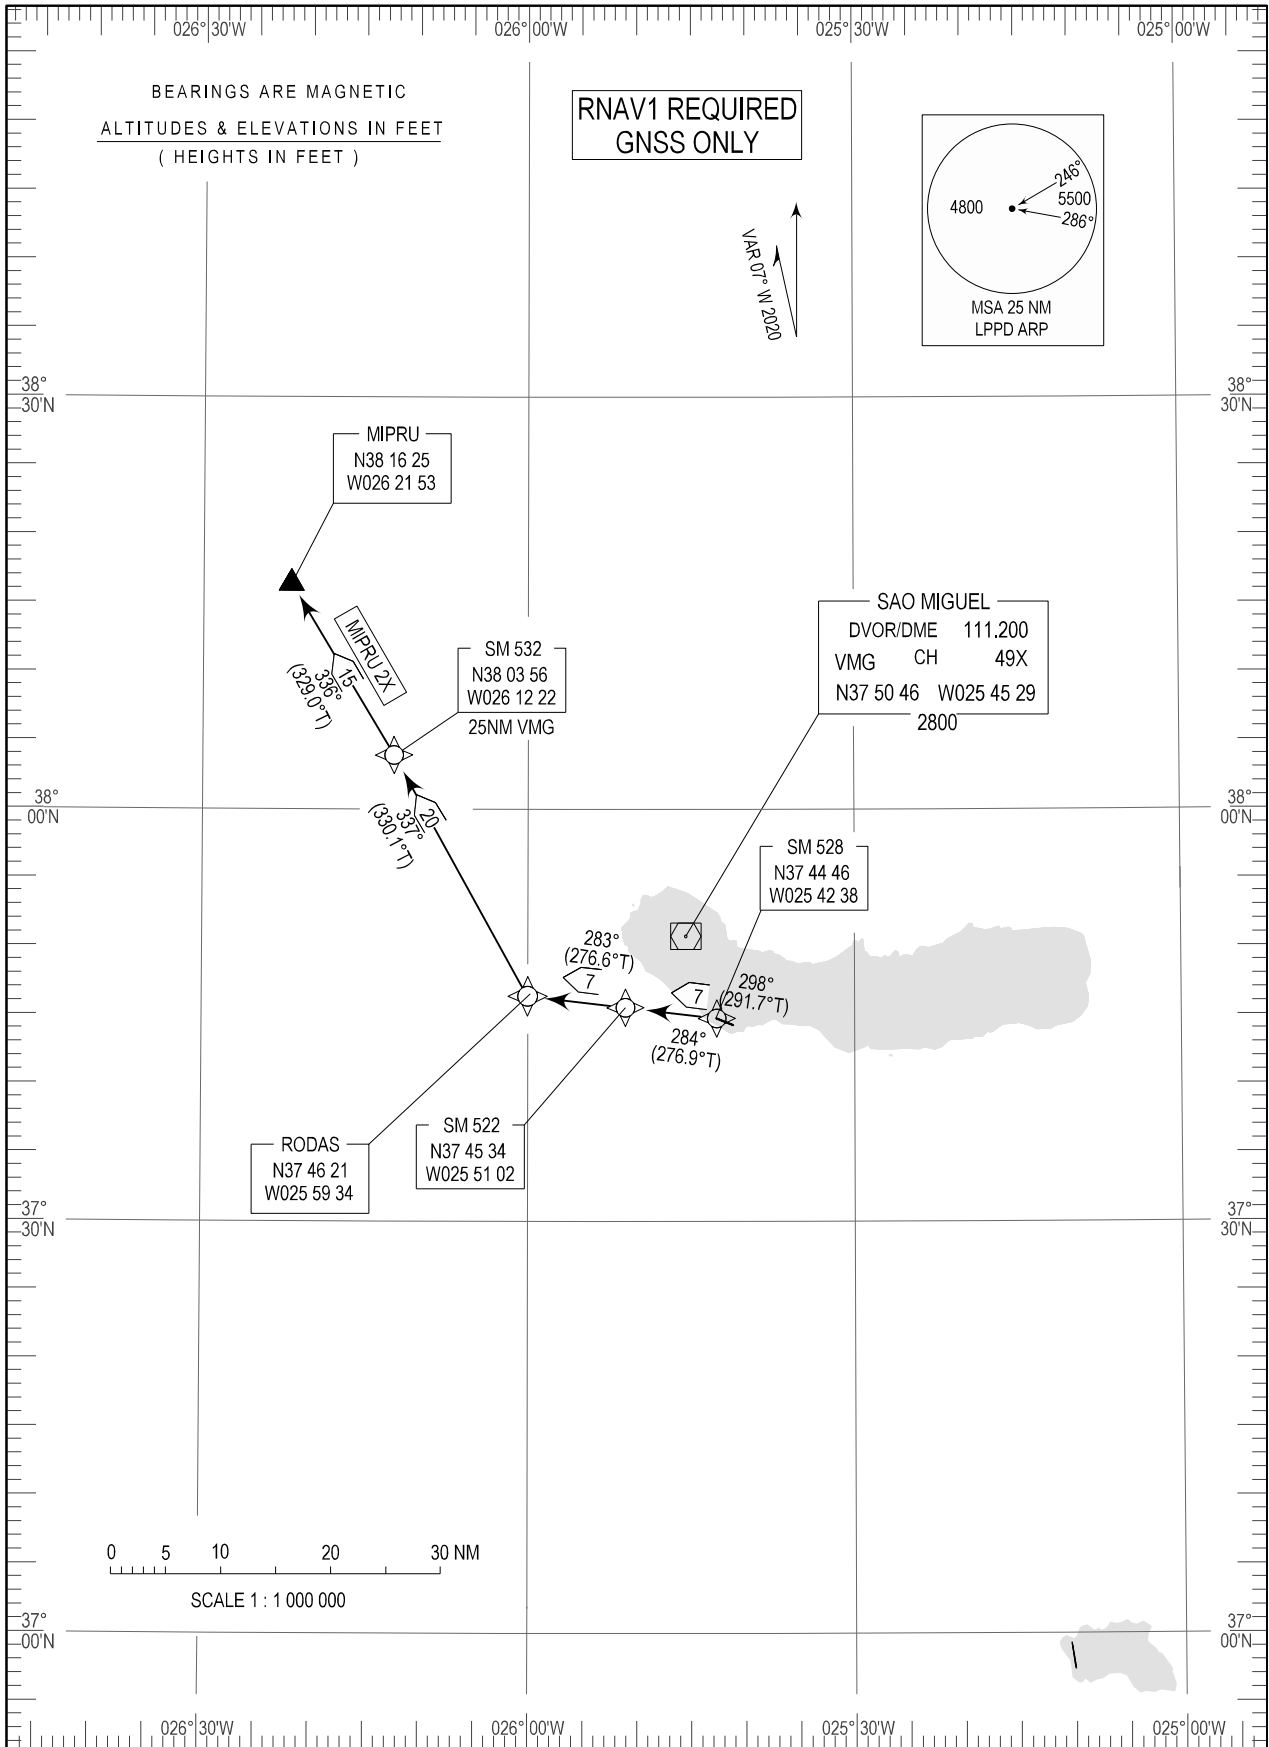

MAG VAR updated.

SID Procedure Coding Table
Ponta Delgada SID RNAV 1 RWY 30 - MIPRU 2X

Designator	Route	After Take-off		Remarks
		Climb to ALT/FL	Contact	
MIPRU 2X	After take-off proceed to SM528. Turn left to SM522 - RODAS - SM532 - MIPRU.	-	Ponta Delgada APP FREQ 119.400 MHZ.	-

Path Terminator	Waypoint			Course/ Track MAG (True)	Dist. NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level	Speed		
CF	SM528	-	374445.50N 0254238.24W	298 (291.6)	-	-	-	-	RNAV 1	-
TF	SM522	-	374533.89N 0255102.25W	284 (276.9)	6.70	Left	-	-	RNAV 1	
TF	RODAS	-	374620.54N 0255934.24W	283 (276.6)	6.81	-	-	-	RNAV 1	
TF	SM532	-	380355.68N 0261222.15W	337 (330.1)	20.28	Right	-	-	RNAV 1	
TF	MIPRU	-	381625.00N 0262153.43W	336 (329.0)	14.56	-	-	-	RNAV 1	