


STANDARD DEPARTURE CHART -  
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE  
6000

APP 119.400  
TWR 118.300

PONTA DELGADA  
João Paulo II (LPPD)  
RNAV RWY 30  
BEKUN 5X

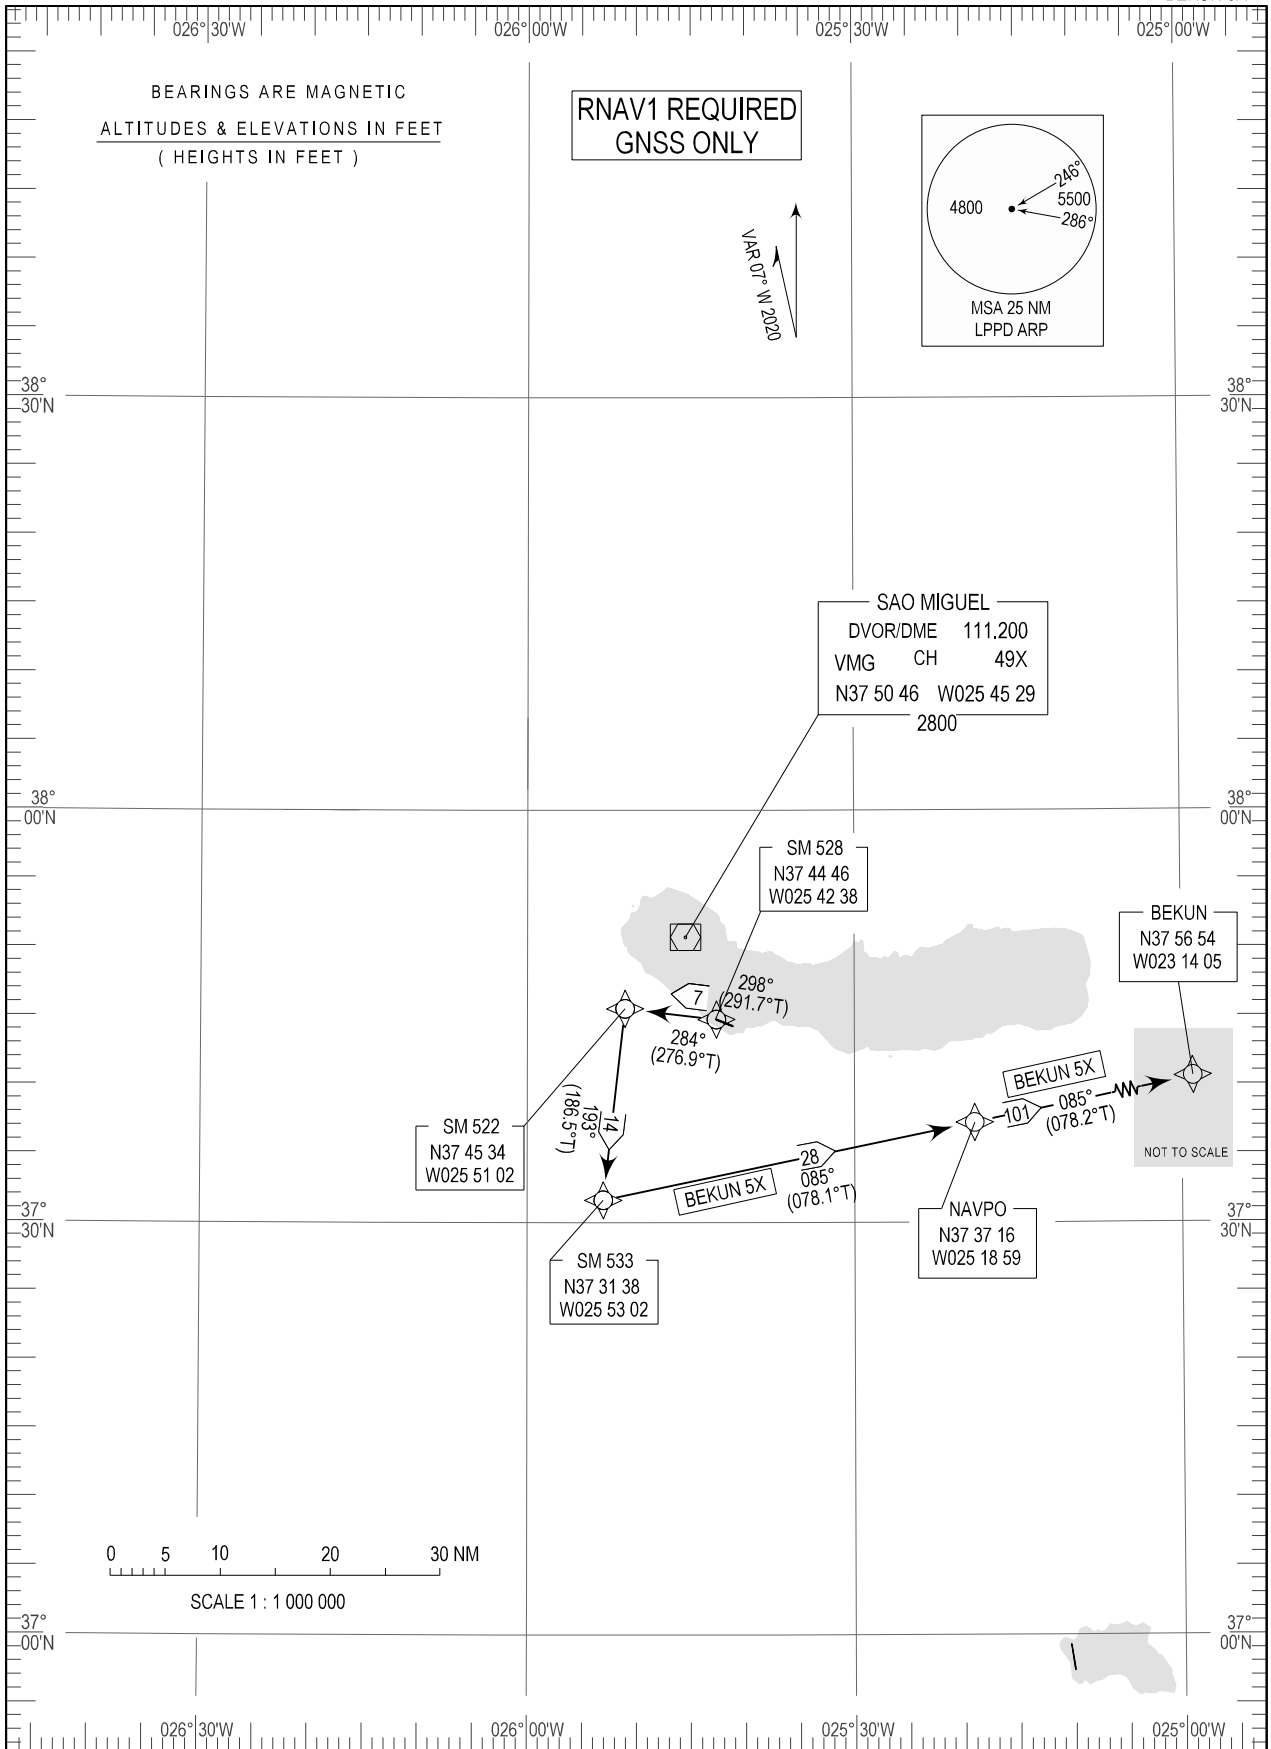

MAG VAR updated.

SID Procedure Coding Table  
Ponta Delgada SID RNAV 1 RWY 30 - BEKUN 5X

Designator	Route	After Take-off		Remarks
		Climb to ALT/FL	Contact	
BEKUN 5X	After take-off proceed to SM528. Turn left to SM522 - SM533 - NAVPO - BEKUN.	-	Ponta Delgada APP FREQ 119.400 MHZ.	Cross NAVPO at or above 5500FT.

Path Terminator	Waypoint			Course/ Track MAG (True)	Dist. NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level	Speed		
CF	SM528	-	374445.50N 0254238.24W	298 (291.6)	-	-	-	-	RNAV 1	
TF	SM522	-	374533.89N 0255102.25W	284 (276.9)	6.70	Left	+1500FT	-	RNAV 1	
TF	SM533	-	373138.29N 0255301.73W	193 (186.5)	14.00	Left	-	240 KT	RNAV 1	
TF	NAVPO	-	373716.05N 0251858.94W	085 (078.1)	27.64	Left	+5500FT	-	RNAV 1	
TF	BEKUN	-	375653.77N 0231404.64W	085 (078.2)	100.94	-	-	-	RNAV 1	