


INSTRUMENT  
APPROACH  
CHART - ICAO

AD ELEV 259 ft  
HEIGHTS RELATED  
THR RWY 30 - ELEV 187 ft

ATIS 123.900  
APP 119.400  
TWR 118.300

PONTA DELGADA/LPPD  
ILS-Z or LOC  
RWY 30  
CAT A-B

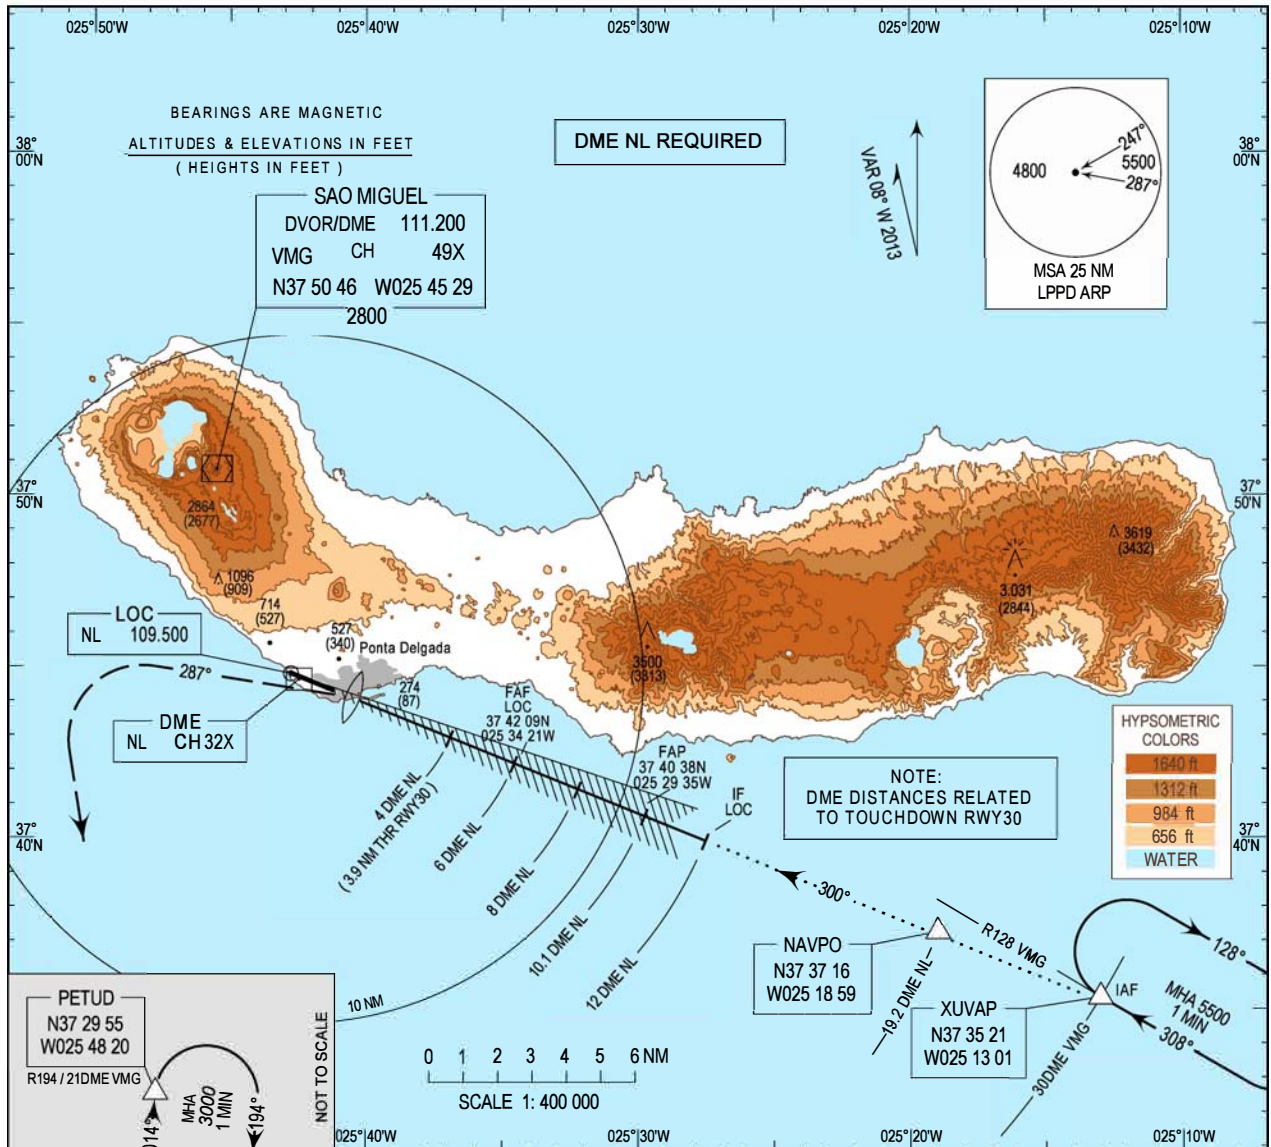

**MISSED APPROACH**  
Turn left climbing on track 287°. Crossing 2000 ft, turn left to PETUD (R194/21DME VMG) climbing to 3000 ft. At PETUD hold or follow ATC instructions.  
RCF: Squawk 7600. Proceed as above. On PETUD make one complete holding pattern at 3000 ft. Then proceed to XUVAP (R128/30DME VMG) climbing to 5500 ft to perform ILS-Z RWY30 approach.  
PETUD to XUVAP RNAV1, if unable advise ATC



CAT	ILS CAT I		LOC		CIRCLING RWY30	
	DA/H	OCH	MDA/H	OCH	NORTH MDA/H	SOUTH MDA/H
A	410 (223)	221	530 (350)	350	NOT AUTHORIZED	660 (401)
B	420 (233)	231	530 (350)	350	NOT AUTHORIZED	760 (501)

LOC 5.2%							
DME-NL	8	7	6	5	4	3	2
Altitude (Height)	2700 (2513)	2400 (2213)	2100 (1913)	1780 (1593)	1460 (1273)	1145 (958)	825 (638)

Rate of descend (5.2%)	kt	80	100	120	140	160	180	200
	ft/min	420	525	630	735	840	945	1050

MHA PETUD changed, missed APCH and RCF updated.

THIS PAGE INTENTIONALLY LEFT BLANK